


# NIS PRO

## Series

Flat + Flexible Screen Installation Solution

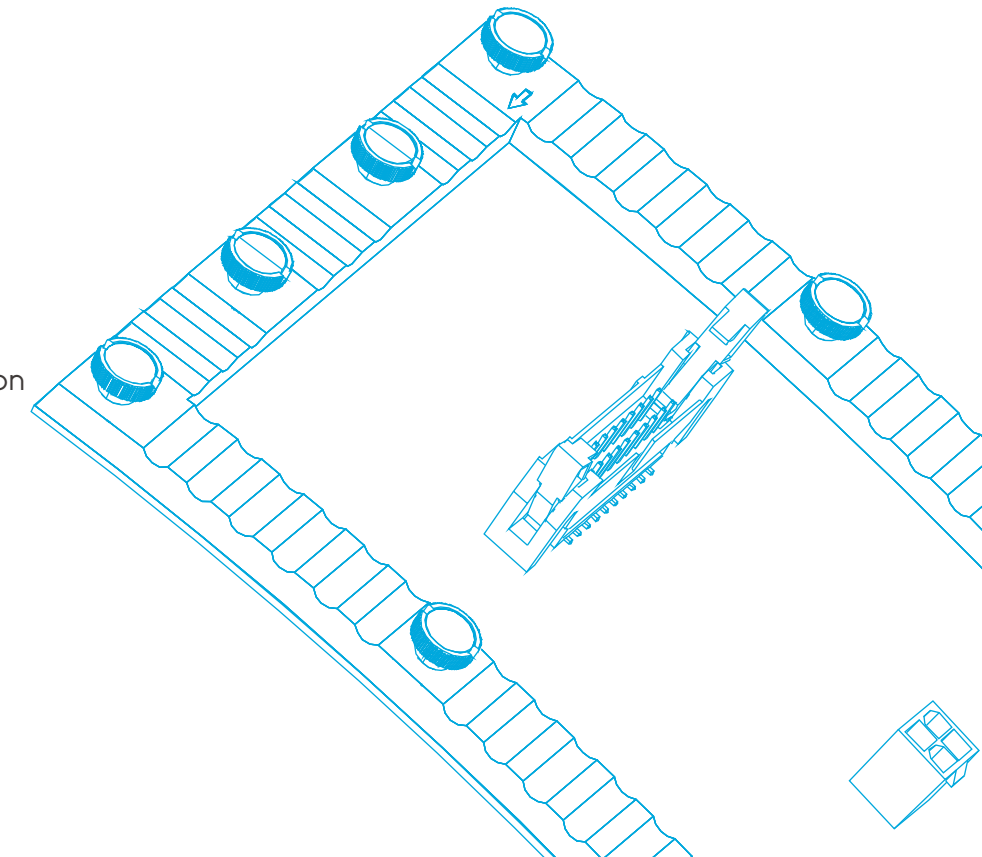

**SHENZHEN UNIVIEW LED CO., LTD**

E-mail: [sales@univiewled.com](mailto:sales@univiewled.com)

Website: [www.univiewled.com](http://www.univiewled.com)

Add: Bldg.A, Meicheng Industrial Park, Langjing Road,  
Dalang St., Longhua District, Shenzhen, China.

**HUIZHOU UNIVIEW LED CO.,LTD**

No. 1 Weigang Road, Sanhe Village, Tonghu Town, Zhongkai  
High-Tech District, Huizhou P.R.China

**UNIVIEW EUROPE B.V.**

Phone: +31 402026113

Add: Verdunplein 9, 5627 SZ Eindhoven, the Netherlands.

**UNIQUE LED INC.**

Add:Sui1100, 7350 Eastgate Rd., Henderson, NV 89011

## Flat + Flexible Screen Installation Solution

# NIS PRO

The NIS PRO series is the latest option for perfect indoor curved installation.

High quality modules with flexible design, which can support customization of all kinds of eye-catching models to meet the creative needs of customers.


- Cost-Effective
- Smooth and Soft
- Perfect Display
- Easy maintenance
- Create changeable Models



# 01

## Cost-Effective

The module is small in size and light in weight, which can realize more usage scenarios possibilities.

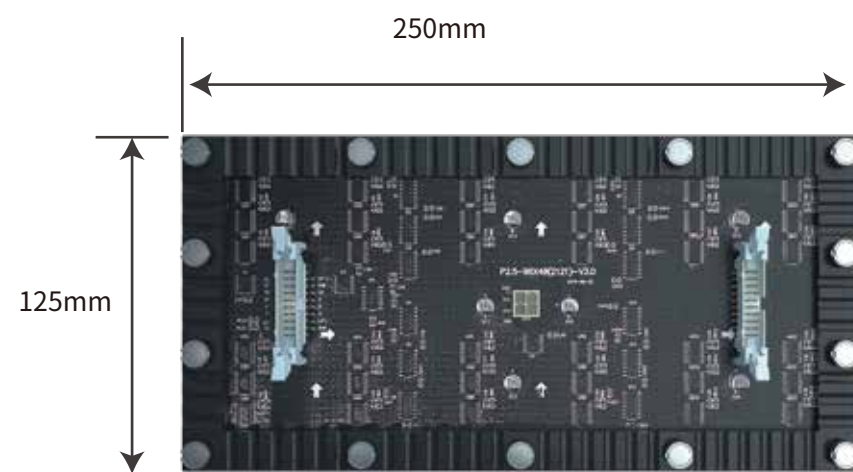


1Pcs=0.21KG

# 02

## Smooth and Soft

High-quality flexible module can be perfectly spliced curved surface, and avoid the crease problem easily when the splice arc is large.

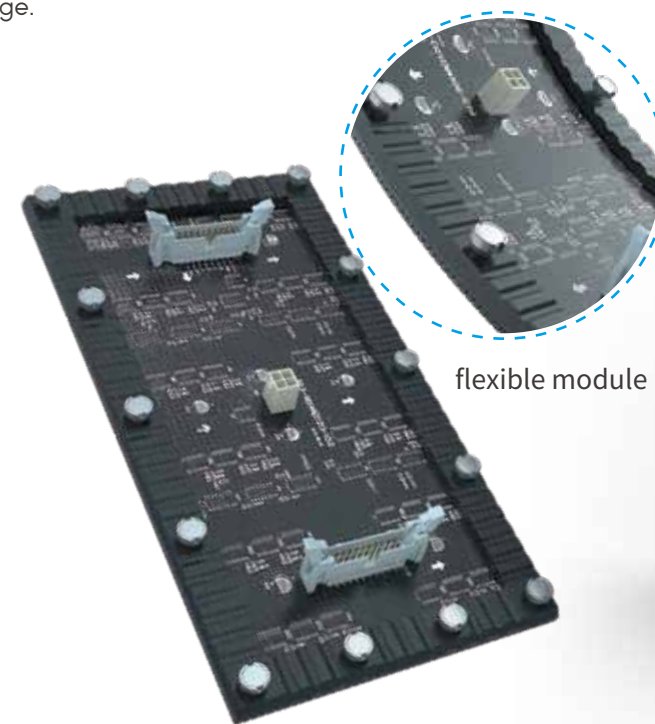



## 03 / Perfect Display

· NIS PRO series has a pixel pitch of 1.9mm and 2.6mm, with ultra-high definition image, which can super fine display of picture details.



## 04 / Fast installation

· NIS PRO module has the cascading function and simple wiring, which makes splicing faster.

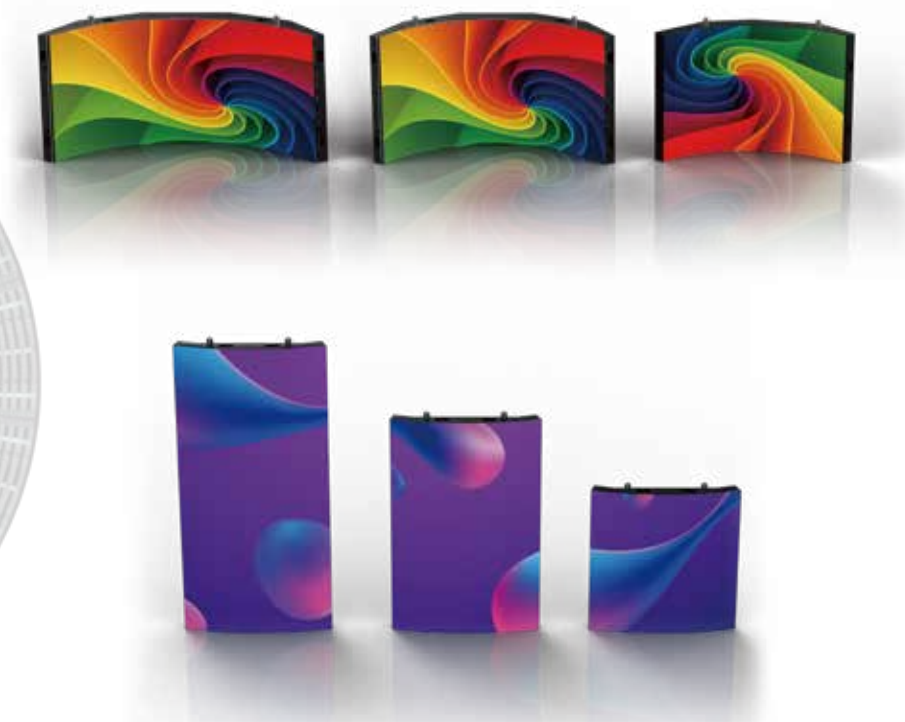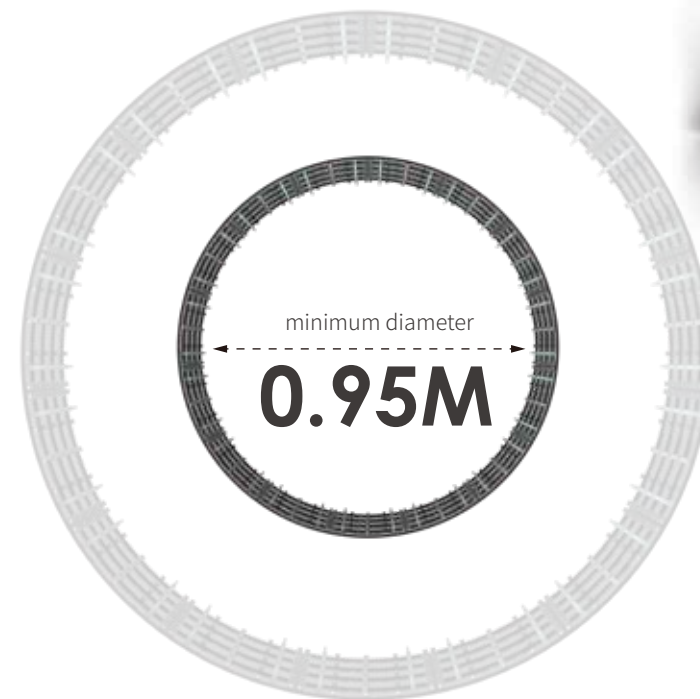


Fit Your Needs - Flexible Module

# 05



## More Reliable

· PCB adopts high-quality FR-4 material, which not only has excellent performance of heat insulation and flame retardancy, but also has a high strength-to-weight ratio and hardness, enhancing the safety and reliability of the display screen.


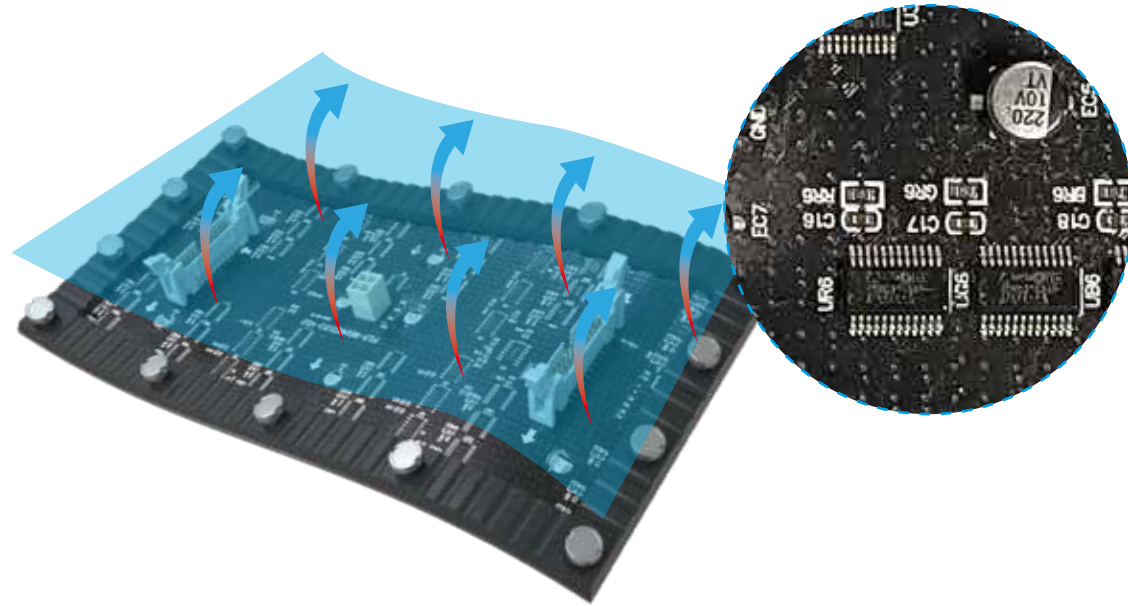


heat insulation and flame retardancy


# 06

## Create changeable Models

· Flexible customization of various screen models, easy to create cylindrical screens, foreground screens, step screens, double-sided screens, etc.

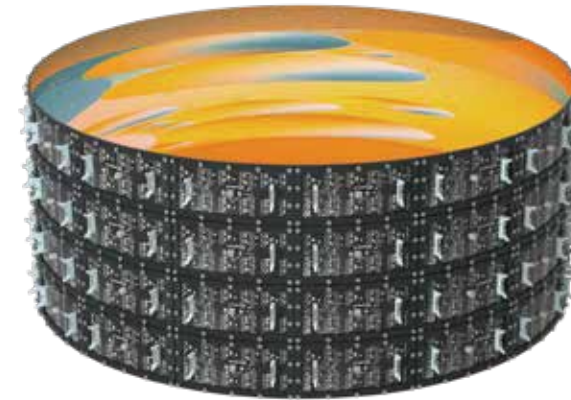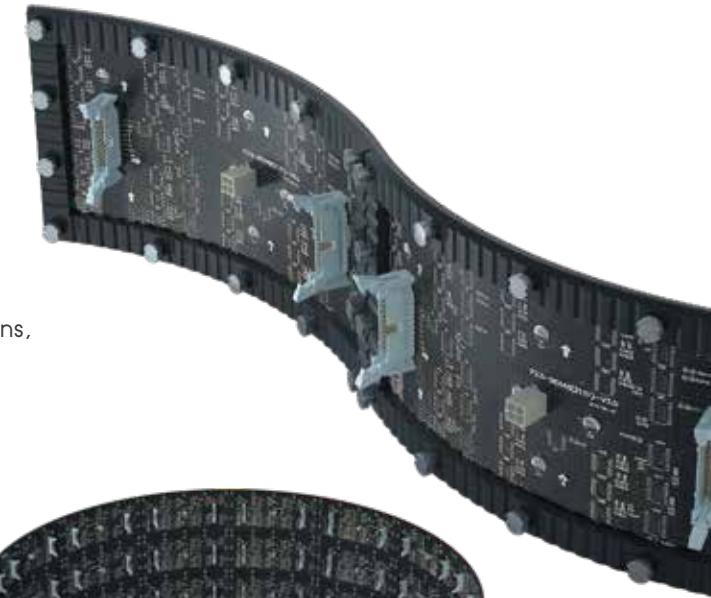

inner arc

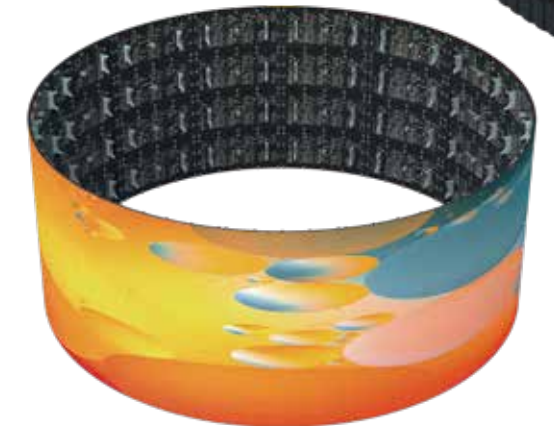

outher arc

## Easy maintenance

The hollow-out design on the bottom shell improves the maintenance efficiency and convenience of the module.



## Parameters

Model	NIS PRO 1.9	NIS PRO 2.6
Pixel Pitch (mm)	1.953	2.604
LED Type	SMD 1515 (Black)	SMD 1515 (Black)
Brightness(cd/m2)	600-800	800-1000
Module Size(mm)	250x125	250x125
Module Resolution	128x64	96x48
Refresh Rate (Hz)	≥3840	≥3840
Viewing Angle(H/V) (°)	140°/140°	140°/140°
Gray Scale (Bit)	≥14	≥14
Cabinet Size (WXHxD)(mm)	500x500x120/ 500x1000x120	500x500x120/ 500x1000x120
Cabinet Weight (kg/pcs)	11.25 / 22.5	11.25 / 22.5
Power Consumption (Max./Avg.)(W/m <sup>2</sup> )	640/210	640/210

\* Technical specifications are subject to change without prior notice. Please contact our sales representative for the latest information.

Taking Notes: