


RK Series



**New launches 960x960
Aluminum Outdoor Fixed Cabinet**

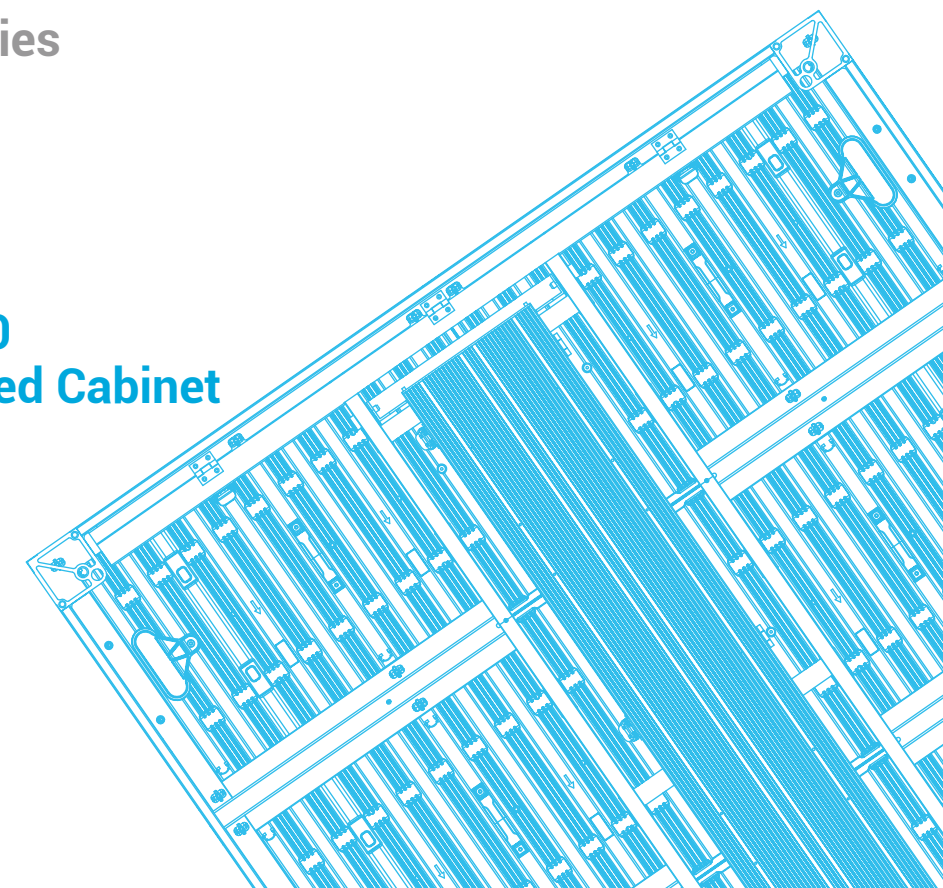

SHENZHEN UNIVIEW LED CO., LTD

E-mail: sales@univiewled.com
Website: www.univiewled.com
Add: Bldg.A, Meicheng Industrial Park, Langjing Road,
Dalang St., Longhua District, Shenzhen, China.

HUIZHOU UNIVIEW LED CO.,LTD

No. 1 Weigang Road, Sanhe Village, Tonghu Town, Zhongkai
High-Tech District, Huizhou P.R.China

UNIVIEW EUROPE B.V.

Phone: +31 402026113
Add: Verdunplein 9, 5627 SZ Eindhoven, the Netherlands.

UNIQUE LED INC.

Add:Suit 100, 7350 Eastgate Rd., Henderson, NV 89011

New launches 960x960 Aluminum Outdoor Fixed Cabinet

RK Series is an outdoor fixed display with a new metal base, and the pixel pitch is 6.6,8.0,10.0 and 16.0mm; RK series adopts various designs and supports various solutions, with flexible installation and maintenance solutions to meet all reasonable needs.

- Stunning Visual Effects
- Good Heat Dissipation Performance
- Realize Unlimited Creativity
- Flexible Installation And Maintenance
- Hidden Wire Design
- Power Backup (N+1)





01 / Stunning Visual Effects

High Contrast


The cabinet adopts SMD2727 long life span and the module adopts high brim mode for higher contrast.

High Refresh

3840hz High refresh rate, high dynamic range image.

02 / Lighter and Stronger

Using aluminum frame material, a single 960*960mm cabinet is only 27.5kg, and the frame structure is strong and durable.

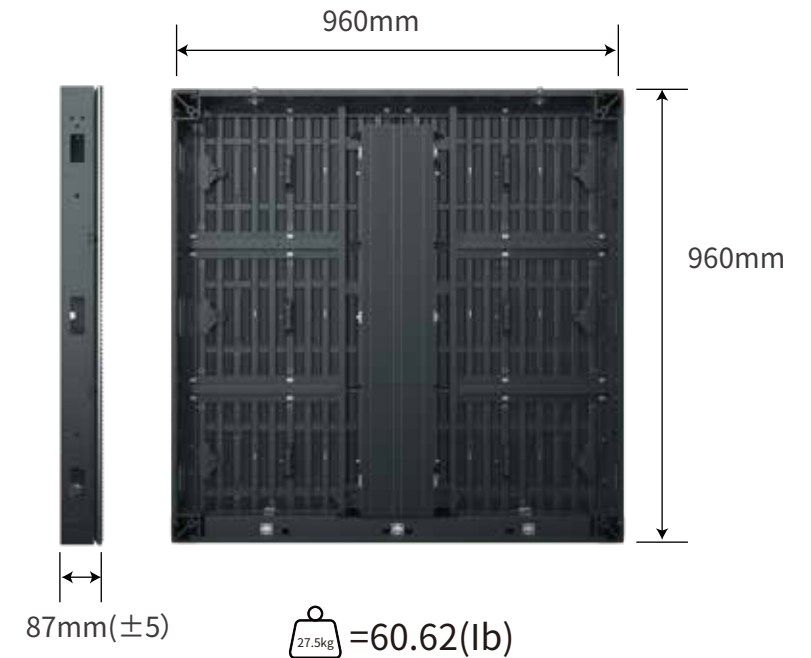



03 / Super Heat Dissipation More Stable

The Bottom Shell Is Made Of Metal.
Silicone With High Thermal Conductivity In The Middle
Good Heat Dissipation, High Stability.

04 /


Realize Unlimited Creativity

- It Can Realize Horizontal And Right Angle Splicing And Installation.
- Can Do Naked Eye 3d Scheme.

① Plane Splicing



② Right Angle Splicing

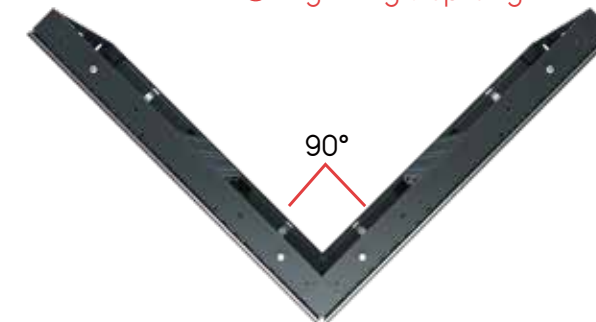

05

Flexible Installation And Maintenance

Support Front And Rear Installation, Front And Rear Maintenance, More Flexible Policy.



06

Wire Hidden Design Box

Wire Adopts Hidden Design, Resistance to Aging.



07

Power Backup (N+1)

Support Dual Receiving Card Backup, Multiple Protection.



Parameters

Model	RK6.6	RK6.0	RK10.0	RK16.0	RK10.0(Energy saving)
Pixel Pitch(mm)	6.667	8.000	10.000	16.000	10.000
LED Configuration	SMD2727 (White)			SMD3535(White)	SMD2727
Module Size(mm*mm)	480x320				
Module Resolution	72*48	144*144	96*96	20*30	96*96
Brightness (CD/m ²)	6000-6500			6500-7000	
Cabinet Size(mm*mm)	960x960x87.1	960x960x87.5		1280x960 960*960*130	960x960x88.1
Cabinet Material	Aluminum			Aluminum	
Cabinet Weight(Kg)	27.5			36.8/27.6	
Refresh Rate(Hz)	≥3840			≥3840	
Contrast ratio	3,000:1			3,000:1	
Grayscale(Bit)	≥14			≥14	
Viewing Angle (H/V) (Deg)	140/108	140/108	140/101	140/96	140/101
Power Consumption (Max./Avg.) (W/m ²)	680/220			720/240	
Work Voltage (V)	100 ~ 240			100 ~ 240	
Operating Temperature(°C)	-20 ~ +50			-20 ~ +50	
Operating Humidity(RH)	10% ~ 90%			10% ~ 90%	
IP Rating (Front/Rear)	IP65/IP55			IP65/IP55	
Type	Outdoor			Outdoor	
Life Span(H)	100,000			100,000	

* Technical specifications are subject to change without prior notice. Please contact our sales representative for the latest information.

Taking Notes :