UR
Series

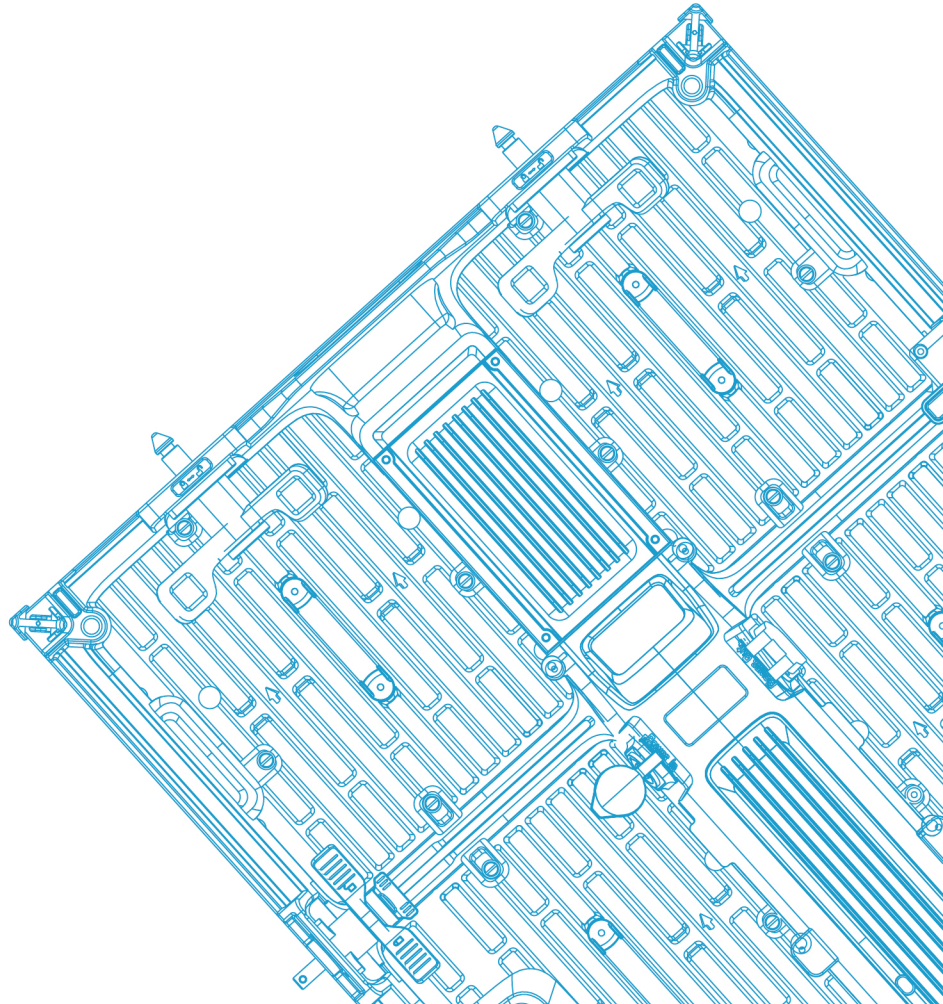## Cost-Effective Rental
(Indoor/Outdoor)

Cost-Effective Rental
(Indoor/Outdoor)

UR Series available in pixel pitches of indoor 2.6/2.9/3.9mm and outdoor3.9/4.8mm, adopts the minimalist and simplistic design, along with stunning image quality, catering to all needs in rental applications at an affordable price.

· Outstanding Visual Performance
· Ultralight but Sturdy
· Unique Curving Lock
· Quick Installation
· Ultimate Versatility
· Modular Design
· Multiple Protections
· Versatile Installations

UR

01 /

Outstanding Visual Performance

· **High Contrast Ratio**
Black face SMD 1515 is used for 2.6mm module to ensure much higher contrast than SMD 2020 which is most commonly used on the market.

· **High Refresh Rate**
3840hz refresh rate for high dynamic range pictures.

· **Astonishing Flatness**
CNC machined aluminum alloy frame ensures an extremely high precision and perfect flatness.
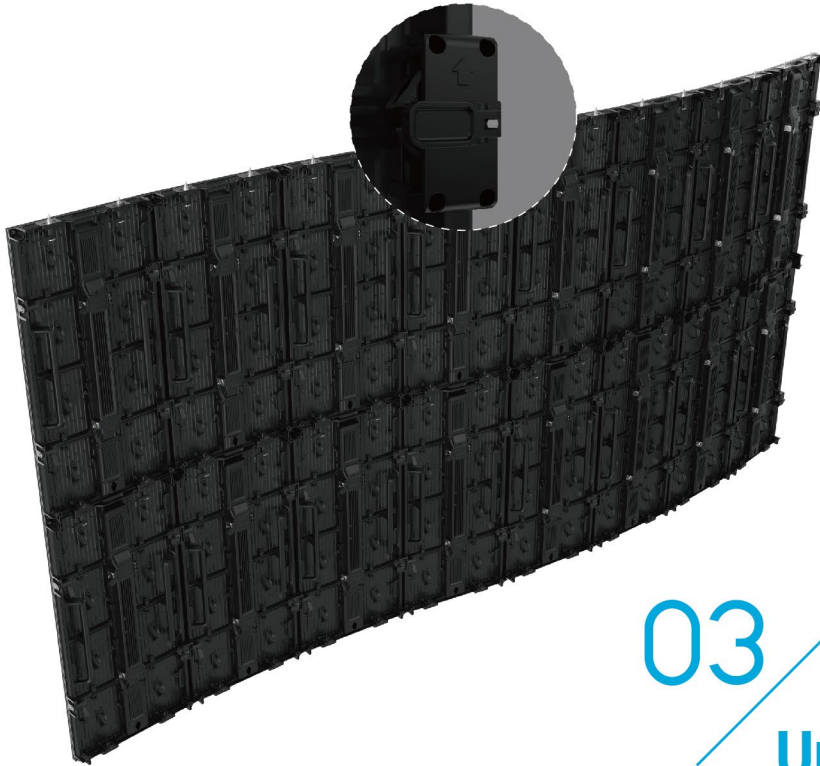
02

Ultralight but Sturdy

· Lightweight cabinets greatly save your labor and transportation cost.

· 500*1000mm cabinets weighs 11.4kg only; 500*500mm cabinets weighs 6.8kg only.

=6.8KG

=11.4KG

Unique Curving Lock

Indoor curve: 0°， ±3°， ±6°
Outdoor curve: 0°， ±3°， ±6°

03/

Unique Curving Lock

· One-of-a-kind curving lock offers 0°， ±3°， ±6° for indoor cabinets and 0°， ±3°， ±6° for outdoor cabinets, which makes installation easy, fast, accurate and reliable.

04

Quick Installation

· Universal module uses magnets and screws together,
  enabling convenient and quick servicing.
· LED modules and power box use captive screws to provide a
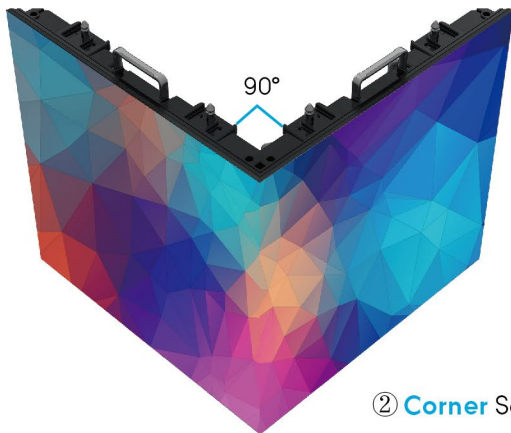 secure joining, and avoid fastener loss.

Captive Screw

Captive Screw on Module

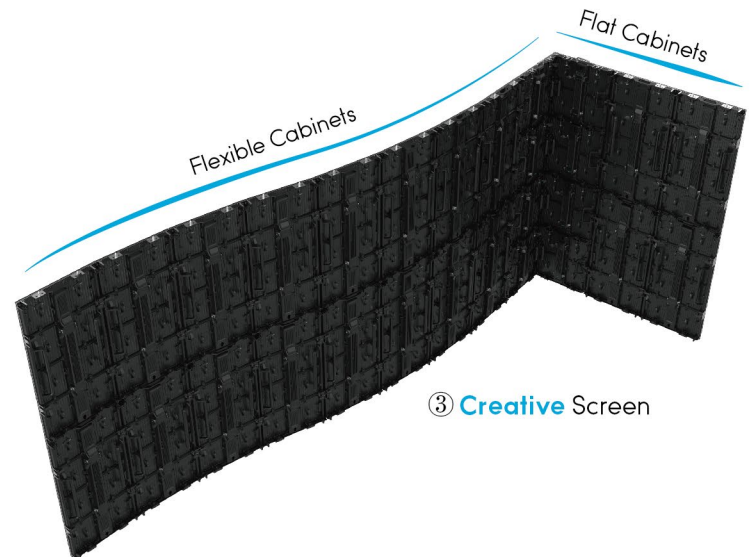Front maintenance for modules

Back maintenance for modules and power supply

① **Curved** Screen

05

Ultimate Versatility
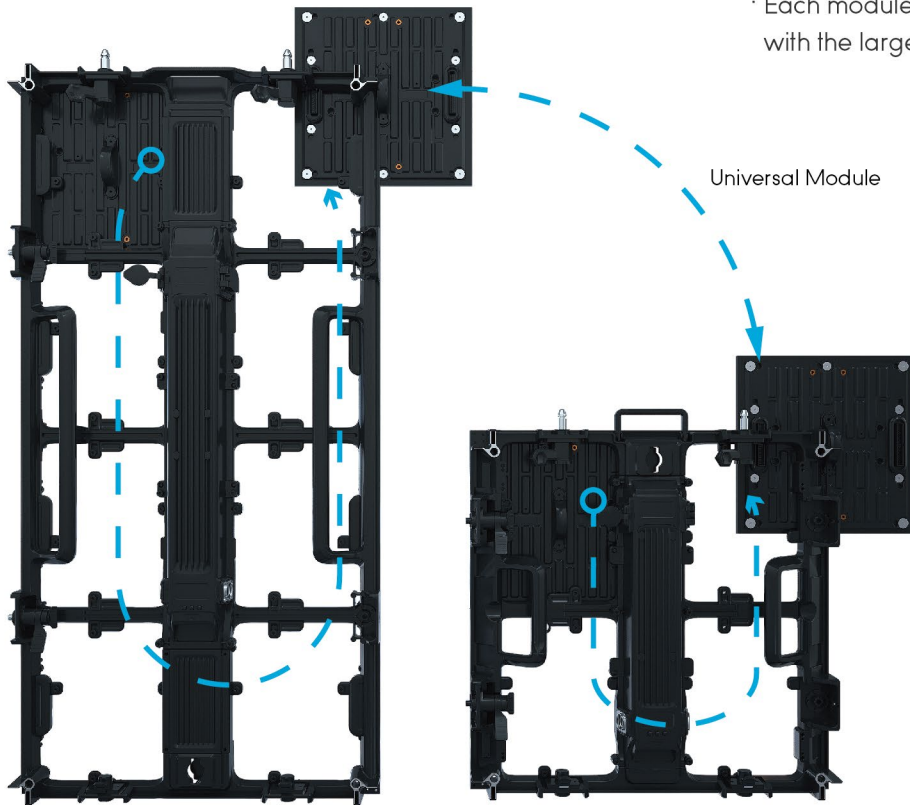
· UR Series cabinets can create concave & convex curve and right-angle. Plus, it can combine with flexible cabinets, perfectly realizing more creative ideas.

90°

② **Corner** Screen

Flat Cabinets

Flexible Cabinets

③ **Creative** Screen

06

Modular Design

· Each module is modular in design and fully compatible with the large or small cabinet frame.

Universal Module

07

Multiple Protections

· UR Series provides corner protection and landing protection against collision damage.

4mm

Parameters

Type	Indoor			Outdoor	
Model	UR2.6	UR2.9	UR3.9	UR3.9	UR4.8
Pixel Pitch (mm)	2.604	2.976	3.906	3.906	4.807
LED Configuration	SMD1515(black)	SMD2020(black)	SMD2020(black)	SMD1921	SMD1921
Adjustable Brightness (cd/m²)	≥800			≥4,000	
Module Size (WxH mm)	250X250				
Module Resolution	96x96	84x84	64x64	64x64	52x52
Refresh Rate (Hz)	≥3840				
Viewing Angle (H/V)	140°(horz.), 140° (vert.)			140°(horz.), 120° (vert.)	
Grayscale (Bit)	≥14				
Cabinet Size (WxHxD mm)	500(W)×500(H)x65(D)mm; 500(W)×1000(H)x65(D)mm			500(W)×500(H)x70(D)mm ; 500(W)×1000(H)x70(D)mm	
Cabinet Weight (kg/panel)	≈6.8; ≈11.4			≈6.9; ≈11.7	
Power Consumption (Max/Avg W/m²)	600/200			720/240	

* Technical specifications are subject to change without prior notice. Please contact our sales representative for the latest information.

Taking Notes:

SHENZHEN UNIVIEW LED CO., LTD
E-mail: sales@univiewled.com
Website: www.univiewled.com
Add: Bldg.A, Meicheng Industrial Park, Langjing Road,
Dalang St., Longhua District, Shenzhen, China.

UNIVIEW EUROPE B.V.
Phone: +31 402026113
Add: Verdunplein 9, 5627 SZ Eindhoven, the Netherlands.